



## 4030MH

Configuration with Modelled Horn satellites powered by class AB amps and external DSP

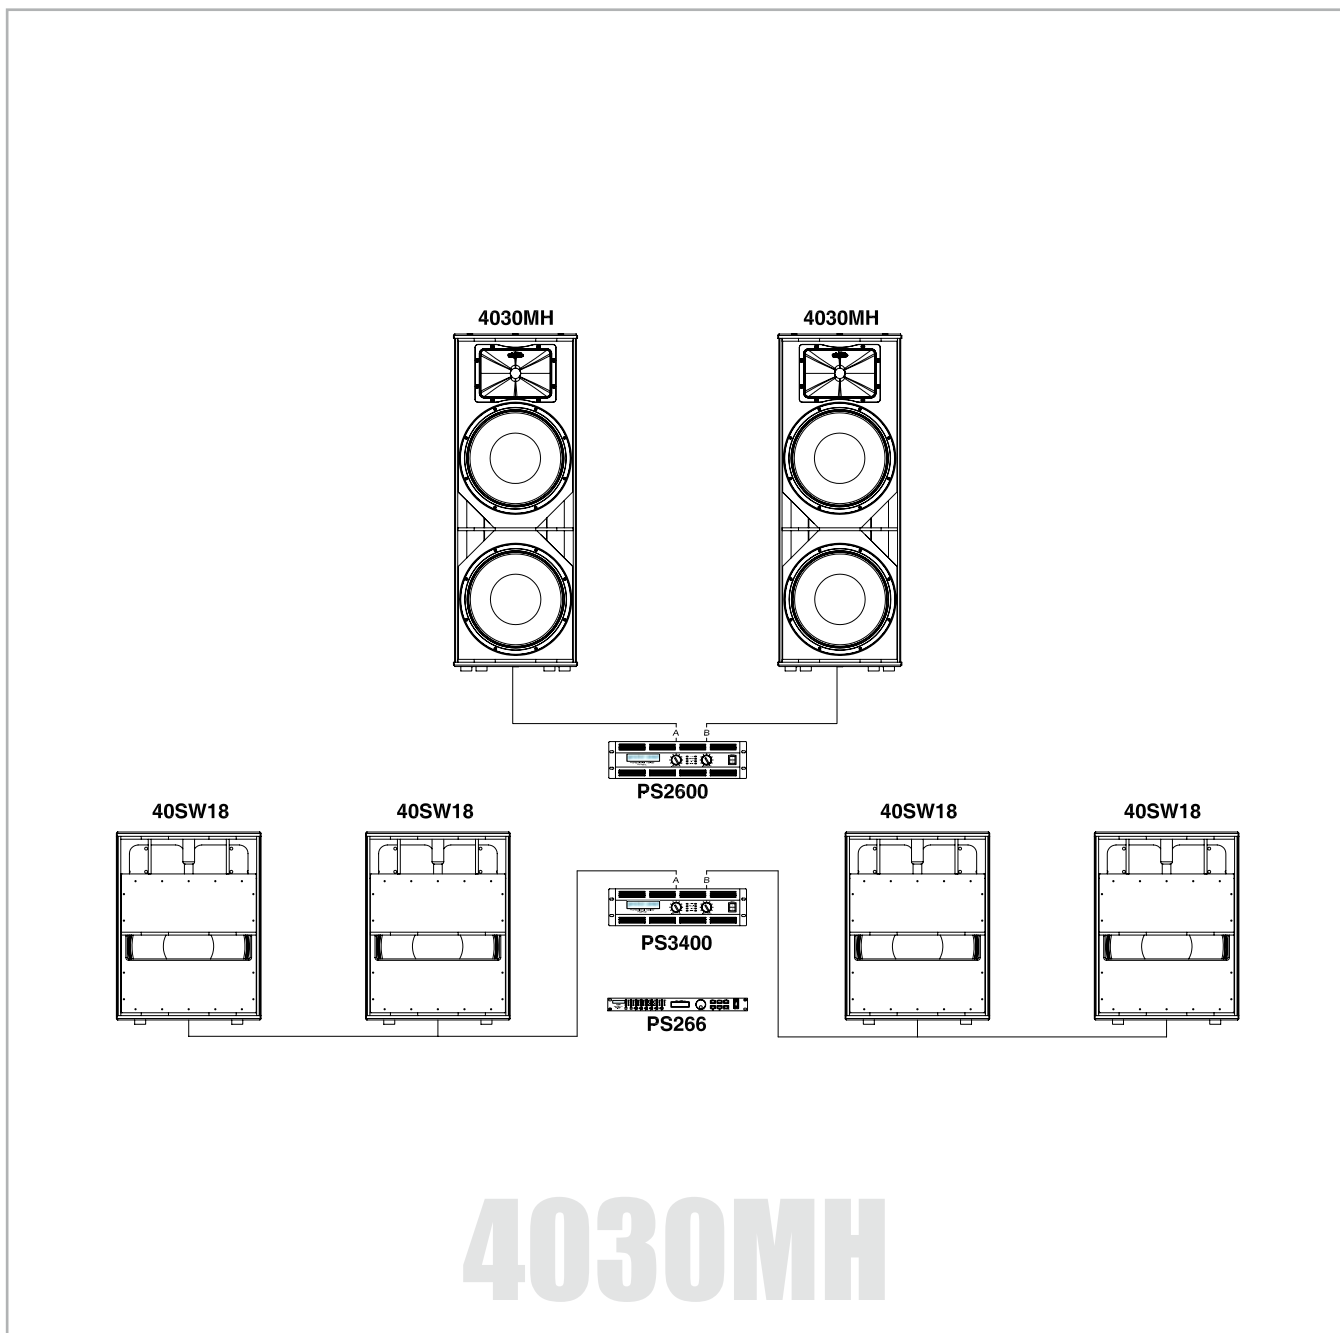

### PRODUCTS

No.	Code	Description
2	<b>4030MH</b>	Professional Loudspeaker system with Modelled Horn - Power RMS: 1080 W - Imp.: 8 Ohm
4	<b>40SW18</b>	Professional Subwoofer - Power handling RMS: 600 W - Impedance: 8 Ohm
1	<b>PS2600</b>	Stereo Power Amplifier - Power RMS: 2x1300 W (@4 Ohm), 2x850 W (@8 Ohm)
1	<b>PS3400</b>	Stereo Power Amplifier - Power RMS: 2x1700 W (@4 Ohm), 2x1000 W (@8 Ohm)
1	<b>PS266</b>	Digital Speaker Management System - Ways: 2 Input, 6 Output

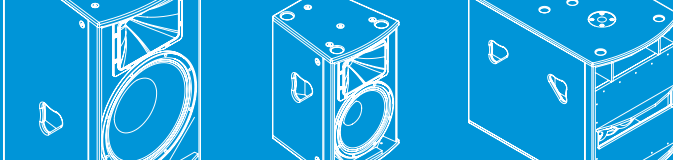

## APPLICATIONS

- Rehearsal studios, demo rooms;
- Dance clubs, night clubs, ballroom dancing and other dancing venues;
- Wine/lounge bars and HO.RE.CA. (*Hotels, Restaurants and Cafés*);
- Beach clubs, bathing establishments;
- Amusement parks, theme parks, circus shows;
- Multi-purpose halls, sport, recreational and/or cultural venues;
- Corporate events.

## BRIEF DESCRIPTION

- Speaker Total Power Handling: **4560 W RMS**;
- Amplifier Total Power: **6000 W** (@ 4 Ohm);
- Covered Area: **150 m<sup>2</sup>** ;
- Quality/Price Ratio: ●●●●○;
- Usable in stacking configuration even for live sound reinforcement **in medium venues**.

## CONNECTORS

The **4030MH** loudspeaker systems and the **40SW18** subwoofers are fitted with a couple of *Neutrik® speakOn NL4* connectors; both connectors are wired in parallel. The dual speakOn connector can link – by parallel connection – one more loudspeaker system of the same type.

The 4030MH satellites utilize only pin assignments 1+/1- for full range mode and the 40SW18 subwoofers make use of the same pins.

TYPE	PINS	1+	1-	2+	2-
<b>NL4</b>		4030MH full range input +	4030MH full range input -	/	/
<b>NL4</b>		40SW18 input +	40SW18 input -	/	/

## PROCESSOR PRESETS

DSP UNIT	SOUND FILE	FUNCTION
<b>PS266</b>	<b>4030MH.syx</b>	4030MH without subwoofers
	<b>4030MH+40SW15-18_LP90.syx</b>	4030MH with 40SW15-18 subwoofers
	<b>4030MH+40SW15-18_LP110.syx</b>	4030MH with 40SW15-18 subwoofers and higher low-pass frequency

## ACCESSORIES

Code	Description
<b>PS-OC6</b>	Kit of three 10MA eyelets for vertical hanging of one Forty series upper module

SOUND REINFORCEMENT

CONTROLLED RADIATION

ACOUSTIC RESEARCH